

# KF-7130

> Multi-Function Kiosk



## Features




- Design for multi-function applications
- High brightness projected capacitive touch
- Durable powder coated metal enclosure
- Feature-rich devices to fulfill different demands
- Integrated with e-payment solution
- Powered by Intel® quad core processor
- Motion sensor for marketing applications
- Easy maintenance via modular design

## Applications

- Hotel check-in self-service kiosk
- Airport check-in kiosk
- Retail and chain store service kiosk
- Food ordering and payment kiosk
- Ticket selling service kiosk
- Hospital service kiosk
- Library service kiosk

## Highlights

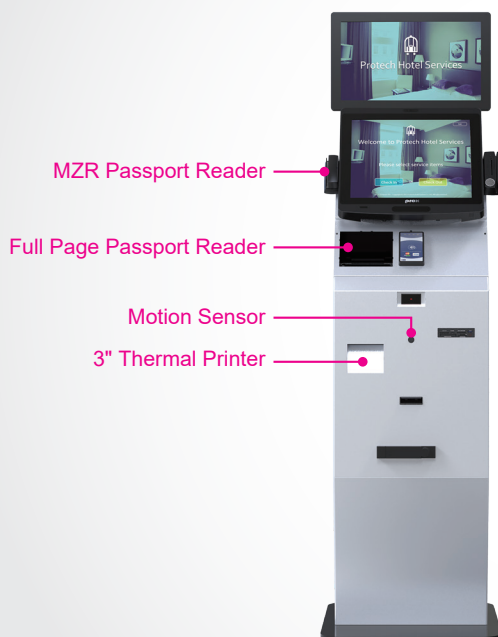

\*All information contained in this document is subject to change without prior notice. Please log on [www.protech.com.tw](http://www.protech.com.tw) to acquire latest information.

## Specifications



System	CPU	Intel® J1900 CPU
	Memory	1 x DDR3L SO-DIMM slot (default 4GB)
	HDD	1 x 2.5" SATA HDD (default 500GB)
	Network	2 x Gigabit 10/100/1000 Base-T Fast Ethernet (RJ45)
	Power Supply	100-240V available
	System Weight	85 kg
	Dimensions (W x H x D) O.S. Support	500 x 1775 x 540 mm (with 2nd display) Windows 10 / Windows 7 / POSReady 7
Operating Display	LCD	17" TFT LCD
	Max. Resolution	1280 x 1024
	Brightness	350 cd/m <sup>2</sup>
	Touchscreen	Projected capacitive touch
	Viewing Angle	Horizontal: (R) 85° / (L) 85° Vertical: (U) 80° / (L) 80°
Add-ons	2nd Display	18.5" 1366 x 768 wide LCD panel
	MSR / IC Card / RFID	MSR: ISO Track 1/2/3 and JIS II IC Card: Read/Write ISO 7816 smart card RFID: Read/Write ISO 14443A Mifare
	Swipe Passport Reader	ICAO compliant documents in near infrared (IR) per ICAO 9303 specification
	Full Page Passport Reader	ICAO compliant documents in near infrared (IR) per ICAO 9303 specification 1D: 2 of 5 interleaved, 2 of 5 industrial, Code 128, and Code 39 2D: PDF 417, QR CodeR, DataMatrix™ and Aztec formats
	Contactless Payment	American Express® ExpressPay, Discover® Network ZipSM, MasterCard PayPass M/Chip™, Visa® payWave qVSDC, Google Wallet, ISIS Wallet
	Barcode Scanner	1D: UPC-A, UPC-E, EAN-8, EAN-13, UCC/EAN-128, Code 39, Code 93, Interleaved 2 of 5, Codabar, MSI, GS1 Databar 2D: PDF417, MicroPDF417, DataMatrix, QR Code, MaxiCode
	Thermal Printer	3" thermal printer with 12 mm/25 mm bars axis 2" thermal printer with 12 mm/25 mm bars axis
	Media Card Reader	CF, SD/MMC, MS, M2, xD, MircoSD
	Card Dispenser + RFID Module	Card capacity: 300 pcs Read/Write ISO 7816 card Mifare 14443A 1K/4K, ultra light
Motion Sensor	Detection distance: 350 mm~1000 mm Detection angle: Horizontal: +/- 30 degrees Vertical: +/- 30 degrees	
Environment	EMC & Safety	CE / FCC
	Operating Temp.	5°C~35°C
	Storage Temp.	0°C~60°C
	Humidity	20%~85% (no condensation)

## Dimensions

