



21.5" Fanless Slim POS Terminal



Features

- Fanless design with Intel® Core™ i5-1245UE / i3-1215UE / Celeron® 7305E
- 21.5" LCD display with projected capacitive touchscreen
- Aluminum die casting back cover
- HDD easy maintenance design
- Versatile design for multiple applications
- MSR / RFID / Barcode Scanner / Camera (Option)
- VESA 100 x 100 standard


Specifications

| | |
|------------------------|---|
| System | |
| CPU Support | Intel® Core™ i5-1245UE Intel® Core™ i3-1215UE Intel® Celeron® 7305E |
| Memory | 1 x DDR4L SO-DIMM (up to 32GB) |
| Network | 10/100/1000/2.5GBASE-T Ethernet |
| Power Supply | 90/120 watt power adapter |
| Audio | 2W speaker |
| System Weight | With power adapter approx. 7 kg (POS) / 3.8 kg (PPC) |
| Dimensions (W x H x D) | POS type: 551 x 450 x 297 mm PPC type: 535 x 342 x 59.2 mm |
| O.S. Support | Windows® 11 / Windows® 10 |
| Storage | |
| SATA | 1 x 2.5" HDD or SSD |
| I/O Ports | |
| USB | Rear: 2 x USB 2.0 / 2 x USB 3.1 |
| Serial Ports | 3 x RJ45 (all support +5V/12V selectable) |
| LAN | 1 x RJ45 |
| Audio | Line-out: 1 x 3.5 mm phone jack Mic-in: 1 x 3.5 mm phone jack |
| Cash Drawer | 1 x RJ11 (+12V or +24V selectable) |
| DC In | 1 x 4pin DC power jack |
| Add-ons | |
| MSR & i-Button | ISO I,II,III; JIS II and support information key |
| RFID | ISO14443A read/write; ISO18092 read only |
| Camera | 5.0M pixel CMOS camera module |
| Barcode Scanner | 1D: EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GS1 Databar, Code 39, Code 11 2D: PDF417, QR Code, Micro QR, Data Matrix. |
| Display | |
| LCD | 21.5" TFT LCD |
| Max. Resolution | 1920 x 1080 |
| Brightness | 250 cd/m ² |
| Touchscreen | Bezel-free projected capacitive |
| Tilt Angle | 0~50 degrees |
| Environment | |
| EMC & Safety | CE / FCC |
| Operating Temp. | 0°C~35°C |
| Storage Temp. | -20°C~70°C |
| Humidity | 20RH~85RH |


Highlights



System I/O Ports

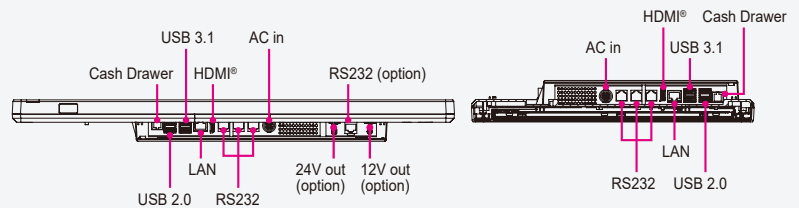

Dimensions

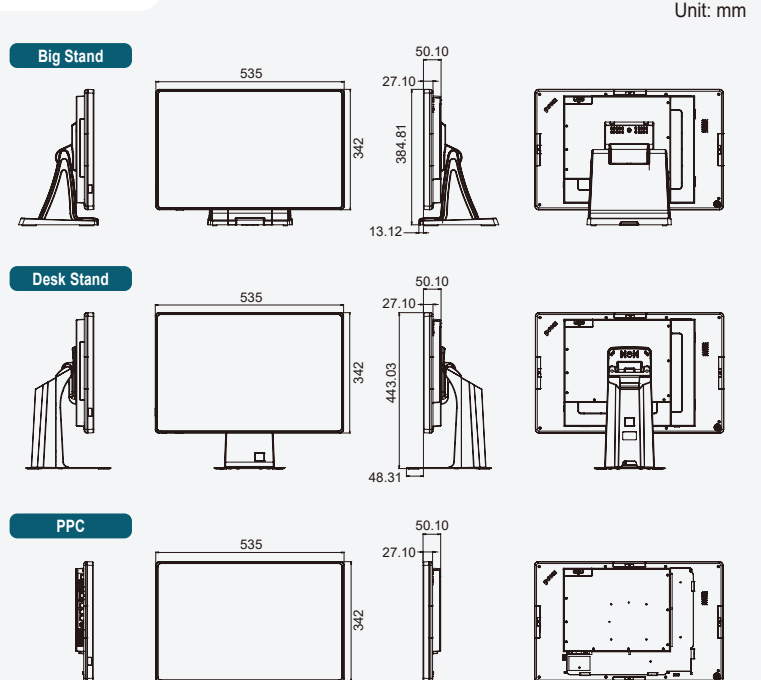

Application



* All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information. For detail mechanics drawing, please contact our sales.